GLOBAL GREEN TAG INTERNATIONAL



James Hardie New Zealand Ltd

Linea[™] Weatherboard, Oblique[™] Weatherboard, Stria[™] Cladding, Axon[™] Panel, Secura[™] Interior Flooring, Hardie[™] CLD Cavity Battens, Hardie[™] Axent Trim

Linea[™] Weatherboard is a 16mm thick weatherboard. Oblique[™] Weatherboard Stria Cladding is a 14mm thick shiplap board offering multiple installation options. Axon[™] Panel is a range of 9mm thick vertically grooved panels. Secura[™] Interior Flooring is a dual-function 19mm thick sheet. Hardie[™] CLD Cavity Battens is a low-density, non-combustible, fibre cement structurally fixed cavity batten. Hardie[™] Axent Trim is a thick, versatile, advanced cement composite trim. It is used for edge treatment around window and door frames.

Linea[™] Weatherboard, Oblique[™] Weatherboard, Stria[™] Cladding, Axon[™] Panel, Secura[™] **Products/Ranges:** Interior Flooring, Hardia[™] CLD Cavity Battens, Hardie[™] Axent Trim


Product Stages Assessed: Product Type:

CSI Masterformat: Licenced Site/s: Licence Number: Licence Date: Valid To: Standard: Screening Date: PHD URL: Manufacturing + In-Use Fiber Cement Siding 07 46 46 Auckland, New Zealand

JHN:JH04:2024:PH 19th February 2024 19th February 2025 GGT International v4.0 19th February 2024 https://www.globalgreentag.us/certificate/2569







GreenTag Banned List Compliant.


ScreenTag PHD recognized by WELL * & LEED * Material Transparency & Optimization credits included below:

Meets Green Star * 'Buildings v1.0' as Recognized for~ Credit 9: Responsible Finishes;

Meets IWBI * WELL * v1.0 as Recognized for ~ Feature 26 (Part 1); Feature 97 (Part 1); as a Compliant Technical Document (Audited) for ~ Feature 11 (Part 1); Feature 25 (Part 1, 2, 3) , and, meets IWBI * WELL * v2.0 as Recognized for ~ X07 (Parts 1, 3); X08 (Part 2); as a Compliant Technical Document (Audited) for ~ X01 (Part 1); X05 (Part 2); X07 (Part 2); X08 (Part 1).

Meets USGBC LEED* v4.0 and v4.1 Rating Tool Credit as Recognized for MR Credit: Building Product Disclosure and Optimisation - Material Ingredients - Option 1: Material Ingredient Reporting, Option 2: International ACP - REACH Optimisation.

Independent third party assessment for worker, user, and environmental exposure to any Carcinogens, Mutagens, Reproductive Toxicant or Endocrine Disruptors.

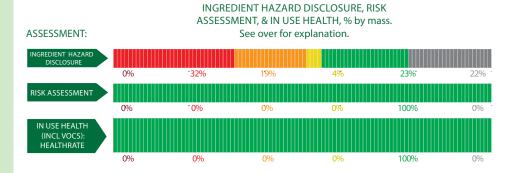

Declared by: Global GreenTag International Pty Ltd



David Baggs CEO Verified compliant with: ISO 14024 & ISO 17065

Linea[™] Weatherboard, Oblique[™] Weatherboard, Stria[™] Cladding, Axon[™] Panel, Secura[™] Interior Flooring, Hardie[™] CLD Cavity Battens, Hardie[™] Axent Trim, James Hardie New Zealand Ltd, https://www.globalgreentag.com/getfile/13300/phd.pdf

1.0 Scope

The Global GreenTag International (GGT) Product Health Declaration (PHD) has been designed to provide an additional level of service to the green product sector in facilitating an easier understanding of both the hazard and risks associated with any certified products, and is intended to indicate:

- Chemical hazards of both finished product and unique ingredients to a minimum level of 100ppm for final product throughout the product life cycle (including any VOC or other gaseous emissions);
- An assessment of exposure or risk associated with ingredient handling, product use, and disposal in relation to established mitigation and management processes;

It is not intended to assess:

- i. substances used or created during the manufacturing process unless they remain in the final product; or
- ii. substances created after the product is delivered for end use (e.g., if the product unusually degrades, combusts or otherwise changes chemical composition).

GGT PHDs are only issued to products that have passed GGT Standards' certification requirements. The Level of Assessment (BronzeHEALTH, SilverHEALTH, GoldHEALTH or PlatinumHEALTH) of a PHD rating relates ONLY to a Human Health Toxicity Assessment and is declared separately and not equivalent to the overall Bronze, Silver Gold or Platinum Green Tag Certification Mark Tier Levels of LCARate.

1.2 Preparing a PHD

GGT PHDs are prepared in the format of a transparency document which utilizes Hazard Classifications from the UN Globally Harmonised System of Classification and Labelling of Chemicals (GHS). Hazard Classifications are then risk assessed with a focus on the In Use stage for an outcome of Certification. Assessments are undertaken by GGT Qualified Exemplar Global Lead Auditors and subsequently accepted for Certification by the GGT Program Director (also a Qualified Exemplar Global Lead Auditor) under the International Standard v4.0/4.1, Personal Products Standard v1.0/1.1, or Cleaning Products Standard v1.1/1.2 and above Program Rules.

1.3 External Peer Review

Every GGT PHD is independently peer-reviewed by an external Consultant Toxicologist and Member of the Australasian College of Toxicology & Risk Assessment.

2.0 Declaration of Ingredients

Where a manufacturer wishes recognition under a rating program that requires transparency of ingredients, such as LEED * v4.0 & v4.1, WELL * v1.0 & v2.0, Green Star *, the following information is declared from the audit:

| Colour | Ingredient Hazard Disclosure |
|----------|---|
| Green | Level 4 The hazard level of this ingredient indicates that the ingredient has no toxic hazard statements with no identified health effects. |
| Yellow | Level 3 The hazard level of this ingredient indicates that the ingredient is mildly toxic and/or has short/medium term reversible health effects. |
| Orange | Level 2 The hazard level of this ingredient indicates that the ingredient is moderately toxic and/or with a moderate health effects. |
| Red | Level 1 The hazard level of this ingredient indicates that the ingredient is highly toxic with a potential for severe health effects. |
| Black | Level 0 The hazard level of this ingredient indicates that the ingredient is highly toxic with a potential for severe health effects and is banned from being detectable above trace amounts in the final product. |
| Grey | Grey Chemical Not able to be categorised due to lack of toxicity impact information. |
| Colour | Risk Assessment & In Use Health Assessment Outcome |
| Green | No Concerns The risk assessment outcomes for the hazard level and percentage of ingredient used in the product after risk assessment is considered highly unlikely and therefore without concerns. |
| Yellow | Human Health Comment The risk assessment outcome for the hazard level and percentage of ingredient used in the product is after risk assessment considered low with an unlikely potential risk. |
| Orange | Issue of Concern or Issue of Concern Minimised The risk assessment outcome for the hazard level and percentage of ingredient used in the product is after risk assessment considered low to high with a higher than unlikely potential for risk. |
| Red | Red Light Comment or Red Light Comment Minimised The risk assessment outcome for the hazard level and percentage of ingredient used in the product is after risk assessment considered low to extremely high with a moderate potential for risk. |
| Dark Red | Red Light Exclusion The risk assessment outcome for the hazard level and percentage of ingredient used in the product is after risk assessment considered medium to extremely high with a likely potential for risk. |
| Grey | Grey Chemical Not able to be categorised due to lack of toxicity impact information. |
| Black | Banned Ingredients Level 0 Hazard Level categorised chemicals such as Substances of Very High Concern in the International Standard v4.0/v4.1 and/or Petro- leum, Parabens plus a wide range of additional compounds stipulated by the Personal Products Standard v1.0/1.1 and Cleaning Products Standard v1.1/1.2 |

Global GreenTag International Pty Ltd (Global GreenTag) is not a medical professional organisation. Global GreenTag does not purport to provide medical advice, and makes no warranty, representation, or guarantee regarding the declaration that it provides in relation to any allergies, chemical sensitivities or any other medical condition, nor does Global GreenTag assume any liability whatsoever arising out of the application or use of any product or piece of equipment that has been chemically assessed by Global GreenTag.

The chemical assessments carried out provide transparent information peer reviewed by a consultant toxicologist regarding the chemical make-up and ingredients of certain materials and products, but such assessments are not to be taken as any form of medical assessment or health advice and are not targeted towards providing specific solutions to allergenic conditions or any other type of medical concerns.

Users must carry out their own investigations if they are concerned about specific medical conditions and the impact of certain products or ingredients in relation to specific medical concerns.

Global GreenTag takes no responsibility and is not liable in any way with respect to any medical or health issues arising from a person's use of materials or products that have been chemically assessed by Global GreenTag. Global GreenTag shall not be liable for any direct, indirect, punitive, incidental, special or consequential damages to property or life whatsoever, arising out of or connected with the use or misuse of any materials or products that have been assessed by Global GreenTag.



| Ingredient Name | CAS Number OR Function | Proportion in finished product | GHS, IARC & Endocrine Category | REACH Compliance | Ingredient Hazard Disclosure | Risk Assess- ment | In Use Health Assess- ment | Comment |
|--------------------------------|------------------------------|--------------------------------------|--------------------------------------|---------------------|------------------------------------|----------------------|-------------------------------------|---|
| Cement | | | | 1 | | | ment | |
| CALCIUM OXIDE | 1305-78-8 | 0.01-1% | H318, H315, H335 | ОК | | | | The substance can cause serious eye damage, skin irritation, and respiratory irritation. This substance is cured in the final prod- uct and does not pose any significant risks to the user The Fibre cement products are not considered hazardous in their final form but the very fine dust generated when using high speed tools (e.g. circular saws, drills, grinders) could presents a hazard. James Hardie has procedure in place and sds to guide user on how to work safely with their product. During the manufacturing stage, the risk of exposure is low. Supplier has Work Health & Safety policy in place and AS/ NZS 4801:2001 certified. James Hardie has OHS and Environmental Policy in place |
| QUARTZ (CRYSTALLINE SILICA) | 14808-60-7 | 0.01-1% | IARC 1 | ОК | | | | Nanomaterials: Unknown Respirable crystalline silica dust is carcinogenic to humans and classified as IARC Group 1. This substance is cured in the final prod- uct and does not pose any significant risks to the user The Fibre cement products are not considered hazardous in their final form but the very fine dust generated when using high speed tools (e.g. circular saws, drills, grinders) could presents a hazard. James Hardie has procedure in place and sds to guide user on how to work safely with their product. During the manufacturing stage, the risk of exposure is low. Supplier has Work Health & Safety policy in place and AS/ NZ5 4801:2001 certified. James Hardie has OHS and Environmental Policy in place Recycled Content: None Nanomaterials: Unknown |
| PORTLAND CEMENT | 65997-15-1 | 15-30% | H315, H317, H318, H335 | ОК | | | | The substance can cause serious eye damage, skin irritation, and respiratory irritation. This substance is cured in the final prod- uct and does not pose any significant risks to the user The Fibre cement products are not considered hazardous in their final form but the very fine dust generated when using high speed tools (e.g. circular saws, drills, grinders) could presents a hazard. James Hardie has procedure in place and sds to guide user on how to work safely with their product During the manufacturing stage, the risk of exposure is low. Supplier has Work Health & Safety policy in place and AS/ NZS 4801:2001 certified. James Hardie has OHS and Environmental Policy in place Recycled Content: None Nanomaterials: Unknown |
| FLY ASH | 68131-74-8 | 1-5% | None | ОК | - | | | No Hazard Statement Recycled Content: None Nanomaterials: Unknown |

PH

Product Health Declaration

3

| Ingredient Name | CAS Number OR Function | Proportion in finished product | GHS, IARC & Endocrine Category | REACH Compliance | Ingredient Hazard Disclosure | Risk Assess- ment | In Use Health Assess- ment | Comment |
|-----------------------------------|------------------------------|--------------------------------------|--------------------------------------|---------------------|------------------------------------|----------------------|-------------------------------------|---|
| GROUND BLAST FUR- | | | | | | | | No Hazard Statement |
| IACE SLAG | 65996-69-2 | 1-5% | None | ОК | | | | Recycled Content: None Nanomaterials: Unknown |
| | | | | | | | | The substance can cause serious eye and skin irritation. This substance is cured in the final pro uct and does not pose any significant risks to the user |
| IMESTONE (CALCIUM CARBONATE) | 1317-65-3 | 1-5% | H315, H319 | ОК | | _ | | The Fibre cement products are not considered hazardous in their final for but the very fine dust generated wher using high speed tools (e.g. circular saws, drills, grinders) could presents a hazard. James Hardie has procedure ir place and sds to guide user on how to work safely with their product |
| | | | | | | | | During the manufacturing stage, the ri of exposure is low. Supplier has Work Health & Safety policy in place and AS/ NZS 4801:2001 certified. James Hardie has OHS and Environmental Policy in place |
| | | | | | | | | Recycled Content: None Nanomaterials: Unknown |
| GYPSUM | 12207 34 5 | 1 50/ | None | ОК | | | | No Hazard Statement |
| JIPSUM | 13397-24-5 | 1-5% | None | ŬK | _ | _ | | Recycled Content: None Nanomaterials: Unknown |
| MAGNESIUM OXIDE | 1309-48-4 | 0.01-1% | None | ОК | | | | No Hazard Statement |
| | 1303 40 4 | 0.01 170 | None | ÖK | | | | Recycled Content: None Nanomaterials: Unknown |
| ilica | i | | | | | | | Pospirable crystalline cilica duct is |
| | | | | | | | | Respirable crystalline silica dust is carcinogenic to humans and is classifie as IARC Group 1. |
| Crystalline Silica (Quartz) | 14808-60-7 | 30-50% | IARC 1 | ОК | _ | | | Fibre cement products are not consid- ered hazardous in their final form, but the very fine dust generated when usin high-speed tools (e.g., circular saws, drills, grinders) could present a hazard. James Hardie has procedures in place and SDS to guide users on how to wor safely with their product. |
| | | | | | | | | During the manufacturing stage, the risk of exposure is low. James Hardie h OHS and Environmental Policy in place |
| | | | | | | | | Recycled Content: None Nanomaterials: Unknown |
| Pulp | | | | | | | | No Hazard Statement. |
| Cellulose Pulp (FSC certified) | 65996-61-4 | 5-15% | None | ОК | | | | The Pulp is FSC certified. |
| leruneu) | | | | | | | | Recycled Content: None Nanomaterials: Unknown |
| | | | | | | | | No Hazard Statement. |
| Cellulose (FSC Certified) | 9004-34-6 | 5-15% | None | ОК | | | | The Pulp is FSC certified. Recycled Content: None |
| | | | | | | | | Nanomaterials: Unknown |
| | | | | | | | | No Hazard Statement. |
| Hemi cellulose | 9034-32-6 | 1-5% | None | ОК | | | | The Pulp is FSC certified. Recycled Content: None |
| | | | | | | | | necycleu content: None |

PHD

| Ingredient Name | CAS Number OR Function | Proportion in finished product | GHS, IARC & Endocrine Category | REACH Compliance | Ingredient Hazard Disclosure | Risk Assess- ment | In Use Health Assess- ment | Comment |
|--|---------------------------------------|--------------------------------------|--------------------------------------|---------------------|------------------------------------|----------------------|-------------------------------------|---|
| | | | | | | | | No Hazard Statement. |
| Lignin | 9005-53-2 | 0.01-1% | None | ОК | | | | The Pulp is FSC certified. |
| | | | | | | | | Recycled Content: None Nanomaterials: Unknown |
| | | | | | | | | No Hazard Statement. |
| Water | 7732-18-5 | 1-5% | None | ОК | | | | The Pulp is FSC certified. |
| | | | | | | | | Recycled Content: None Nanomaterials: Unknown |
| Additive #1 (AH3) | | | | | | | | |
| | | | | | | | | The substance can cause eye, skin, and respiratory irritation. This substance is cured in the final pro- uct and does not pose any significant risks to the user |
| Aluminium Hydroxide | 21645-51-2 | 1-5% | H319, H335, H315 | ОК | _ | _ | _ | The Fibre cement products are not considered hazardous in their final forr but the very fine dust generated when using high speed tools (e.g. circular saws, drills, grinders) could presents a hazard. James Hardie has procedure in place and sds to guide user on how to work safely with their product |
| | | | | | | | | During the manufacturing stage, the risk of exposure is low. James Hardie h OHS and Environmental Policy in place |
| | | | | | | | | Recycled Content: None Nanomaterials: Unknown |
| Additive #2 (IMP) | i i i i i i i i i i i i i i i i i i i | | | | | | | |
| | | | | | | | | The substance can cause eye, skin, and respiratory irritation. This substance is cured in the final pro uct and does not pose any significant risks to the user The Fibre cement products are not considered hazardous in their final for but the very fine dust generated wher |
| Fused Sodium Potassium Aluminium Silicate | 12736-96-8 | 5-15% | H315, H339, H335 | ОК | | | | using high speed tools (e.g. circular saws, drills, grinders) could presents a hazard. James Hardie has procedure ir place and sds to guide user on how to work safely with their product |
| | | | | | | | | During the manufacturing stage, the risk of exposure is low. James Hardie h OHS and Environmental Policy in place |
| | | | | | | | | Recycled Content: None Nanomaterials: Unknown |
| Acrylic Resin | | | | | | | | No Hazard Statement declared |
| Proprietary | Coatings | 0.01-1% | None | ОК | | | | Recycled Content: None Nanomaterials: Unknown |
| | | | | | | | | |



| Ingredient Name | CAS Number OR Function | Proportion in finished product | GHS, IARC & Endocrine Category | REACH Compliance | Ingredient Hazard Disclosure | Risk Assess- ment | In Use Health Assess- ment | Comment |
|---|------------------------------|--------------------------------------|--------------------------------------|---------------------|------------------------------------|----------------------|-------------------------------------|---|
| | | | | | | | | The substance can cause skin irritation. This substance is cured in the final prod- uct and does not pose any significant risks to the user |
| Triethoxyoctylsilane | 2943-75-1 | 0.01-1% | H315 | ОК | _ | - | _ | The Fibre cement products are not considered hazardous in their final form but the very fine dust generated when using high speed tools (e.g. circular saws, drills, grinders) could presents a hazard. James Hardie has procedure in place and sds to guide user on how to work safely with their product |
| | | | | | | | | During the manufacturing stage, the risk of exposure is low. James Hardie has OHS and Environmental Policy in place |
| | | | | | | | | Recycled Content: None Nanomaterials: Unknown |
| | | | | | | | | The substance can cause eye damage and harmful if swallowed. This substance is cured in the final prod- uct and does not pose any significant risks to the user |
| alpha-lsotridecyl-ome- ga-hydroxy-polyglyco- lether | 9043-30-5 | 0.01-1% | H318, H302 | ок | _ | _ | _ | The Fibre cement products are not considered hazardous in their final form but the very fine dust generated when using high speed tools (e.g. circular saws, drills, grinders) could presents a hazard. James Hardie has procedure in place and sds to guide user on how to work safely with their product |
| | | | | | | | | During the manufacturing stage, the risk of exposure is low. James Hardie has OHS and Environmental Policy in place |
| | | | | | | | | Recycled Content: None Nanomaterials: Unknown |
| | Modifying | | | | | | | No Hazard Statement declared |
| Proprietary | agent | 0.01-1% | None | ОК | | | | Recycled Content: None Nanomaterials: Unknown |
| Alkali Silicate | | | | | | | | |
| | | | | | | | | The substance can cause eye damage and skin irritation. This substance is cured in the final prod- uct and does not pose any significant risks to the user |
| Sodium Sllicate | 1344-09-8 | 0.01-1% | H318, H315, | ОК | _ | - | - | The Fibre cement products are not considered hazardous in their final form but the very fine dust generated when using high speed tools (e.g. circular saws, drills, grinders) could presents a hazard. James Hardie has procedure in place and sds to guide user on how to work safely with their product |
| | | | | | | | | During the manufacturing stage, the risk of exposure is low. James Hardie has OHS and Environmental Policy in place Recycled Content: None |
| | | | | | | | | Nanomaterials: Unknown No Hazard Statement. |
| Water | 7732-18-5 | 0.01-1% | None | ОК | | | | No Hazard Statement. Recycled Content: None Nanomaterials: Unknown |



Notes:

H227: Combustible liquid H302: Harmful if swallowed H315: Causes skin irritation H317: May cause an allergic skin reaction H318: Causes serious eye damage H319: Causes serious eye irritation H335: May cause respiratory irritation H400: Very toxic to aquatic life IARC1: Carcinogenic to human

Test Report:

Secura Interior Flooring has been tested for their VOC and Formaldehyde Emission by CETEC based on ASTM D5116-2017 (Standard Guide for Small-Scale Environmental Chamber Determinations of Organic Emissions from Indoor Material/Products)

The product meets below specification - Green Building Council of Australia - Green Star – Design & As Built V1.3-13.2 - Green Star Interiors V1.3-12.2

Test Result: Total Volatile Organic Compound Emission Rate: 0.034 mg/m2/hr Formaldehyde Emission Rate: 0.013 mg/m2/hr

Comments: Other relevant information as necessary

